

Sertifikaat

REPUBLIEK VAN SUID-AFRIKA

PATENT KANTOOR
DEPARTEMENT VAN HANDEL
EN NYWERHEID



2004/00139

Certificate

REPUBLIC OF SOUTH AFRICA

PATENT OFFICE
DEPARTMENT OF TRADE AND
INDUSTRY


Hiermee word gesertifiseer that
This is to certify that


the documents annexed hereto are true copies of:

Application forms P.1, P.2, P3 and provisional specification and drawings of South African Patent Application No. 2003/9885 as originally filed in the Republic of South Africa on 22 December 2003 in the name of GSBS DEVELOPMENT CORPORATION for an invention entitled "NETWORKS".

Geteken te
Signed at PRETORIA

in die Republiek van Suid-Afrika, hierdie
in the Republic of South Africa, this 10th dag van
day of August 2005

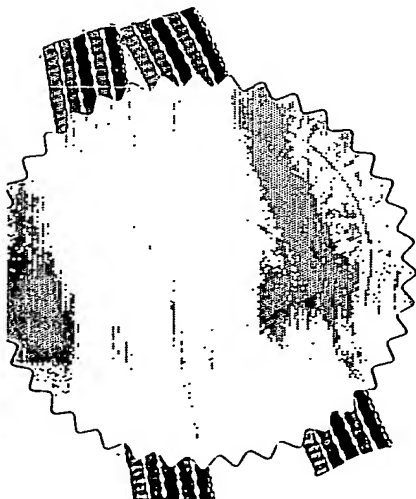

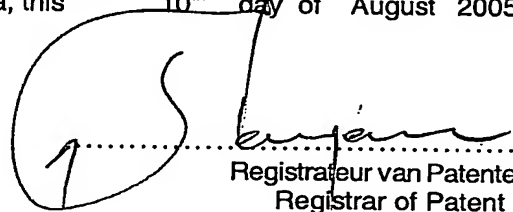
Registrateur van Patente
Registrar of Patent

BEST AVAILABLE COPY

REPUBLIC OF SOUTH AFRICA

PATENTS ACT, 1978

REGISTER OF PATENTS

OFFICIAL APPLICATION NO.		LODGING DATE: PROVISIONAL	ACCEPTANCE DATE
22	01 2003/9885	22 2003-12-22	
INTERNATIONAL CLASSIFICATION		LODGING DATE: COMPLETE	GRANT DATE
51		23	47

FULL NAME(S) OF APPLICANT(S) / PATENTEE(S)

71 GSBS DEVELOPMENT CORPORATION

APPLICANTS SUBSTITUTED

71

DATE REGISTERED

ASSIGNEE(S)

71

DATE REGISTERED

FULL NAME(S) OF INVENTOR(S)

72

- 1) DAVID DENOON-STEVENSON
- 2) NEELS PAUL DE VILLIERS

PRIORITY CLAIMED	COUNTRY	NUMBER	DATE
	33	31	32

TITLE OF INVENTION

54 NETWORKS

ADDRESS(ES) OF APPLICANT(S) / PATENTEE(S)

13515 BALLANTYNE, CORPORATE PLACE, CHARLOTTE, NORTH CAROLINA 28277, UNITED STATES OF AMERICA

ADDRESS FOR SERVICE	Brian Bacon & Associates 2 nd Floor Mariendahl House Norwich on Main Newlands 7700 Cape Town Western Cape	BB REF 10416
74		

PATENT OF ADDITION TO NO.	DATE OF ANY CHANGE
61	
FRESH APPLICATION BASED ON	DATE OF ANY CHANGE

DECLARATION AND POWER OF ATTORNEY

(Section 30 – Regulation 8, 22(i)(c) and 33)

PATENT APPLICATION NO			
21	01	2003/9885	

BB REF:10416

LODGING DATE			
22	22	12	2003

FULL NAME(S) OF APPLICANT(S)	
71	GSBS DEVELOPMENT CORPORATION

FULL NAME(S) OF INVENTOR(S)	
72	1) DAVID DENOON-STEVENSON 2) NEELS PAUL DE VILLIERS

PRIORITY CLAIMED	COUNTRY	NUMBER	DATE
	33	31	32

NOTE: The country must be indicated by its International Abbreviation – see schedule 4 of the Regulations

TITLE OF INVENTION	
54	NETWORKS

- * I/We **Kenneth J. Sheehan**
hereby declare that:-
1. ~~I/We am/are the applicant(s) mentioned above;~~
- ** 2. I/We have been authorised by the applicant(s) to make this declaration and have knowledge of the facts herein stated in the capacity of **Legal Representative** of the applicant(s);
- *** 3. the inventor(s) of the abovementioned invention is/are the person(s) named above and the applicant(s) has/have acquired the right to apply by virtue of an assignment from the inventor(s);
4. to the best of my/our knowledge and belief, if a patent is granted on the application, there will be no lawful ground for the revocation of the patent;
- **** 5. ~~this is a convention application and the earliest application from which priority is claimed as set out above is the first application in a convention country in respect of the invention claimed in any of the claims; and~~
6. the partners and qualified staff of the firm **BRIAN BACON & ASSOCIATES**, patent attorneys, are authorised, jointly and severally, with powers of substitution and revocation, to represent the applicant(s) in this application and to be the address of service of the applicant(s) while the application is pending and after a patent has been granted on the application.

SIGNED THIS 4th DAY OF February 20 04



(no legalization necessary)

- * In the case of application in the name of a company, partnership or firm, give full names of signatory/signatories, delete paragraph 1, and enter the capacity of each signatory in paragraph 2.
- ** If the applicant is a natural person, delete paragraph 2.
- *** If the right to apply is not by virtue of an assignment from the inventor(s), delete "an assignment from the inventor(s)" and give details of acquisition of right.
- **** For non-convention applications, delete paragraph 5.

REPUBLIC OF SOUTH AFRICA
PATENTS ACT, 1978
APPLICATION FOR A PATENT AND ACKNOWLEDGMENT OF RECEIPT
Section 30(1) Regulation 22).

FORM P.1

THE GRANT OF A PATENT IS HEREBY REQUESTED BY THE UNDERMENTIONED APPLICANT
ON THE BASIS OF THE PRESENT APPLICATION FILED IN DUPLICATE

21 01 OFFICIAL APPLICATION NO . . 2003 / 9885

BB REF: 10416

71 FULL NAME(S) OF APPLICANT(S)
GSBS DEVELOPMENT CORPORATION

ADDRESS(ES) OF APPLICANT(S)

13515 BALLANTYNE, CORPORATE PLACE, CHARLOTTE, NORTH CAROLINA 28277, UNITED STATES OF
AMERICA

54 TITLE OF INVENTION

☒ THE APPLICANT CLAIMS PRIORITY AS SET OUT ON THE ACCOMPANYING FORM P.2.
(COUNTRY) (DATE) (NO.)

☐ 21 01 THE APPLICATION IS FOR A PATENT OF ADDITION TO PATENT APPLICATION NO

☐ 21 01 THIS APPLICATION IS A FRESH APPLICATION IN TERMS OF SECTION 37 AND BASED ON APPLICATION NO

THIS APPLICATION IS ACCOMPANIED BY:




- ☒ 1. A single copy of a provisional ~~or two copies of a complete~~ specification of 13
☒ 2. Drawings of 3 sheets
☐ 3. Publication particulars and abstract (Form P.8 in duplicate).
☐ 4. A copy of Figure of the drawings (if any) for the abstract.
☐ 5. An assignment of invention
☐ 6. Certified priority document(s). (State number)
☒ 7. Translation of the priority document(s)
☐ 8. An assignment of priority rights
☐ 9. A copy of Form P.2 and the specification of RSA Patent Application No
☒ 10. Form P.2 in duplicate
☐ 11. A declaration and power of attorney on Form P.3
☐ 12. Request for ante-dating on Form P.4
☐ 13. Request for classification on Form P.9
☐ 14.

74 ADDRESS FOR SERVICE: Brian Bacon & Associates
2nd Floor Mariendahl House
Norwich on Main
Newlands 7700
Cape Town Western Cape

DATED THIS 19th DAY OF December 2003

BRIAN BACON & ASSOCIATES
APPLICANTS PATENT ATTORNEYS

The duplicate will be returned to the applicant's address for service as
proof of lodging but is not valid unless endorsed with official stamp

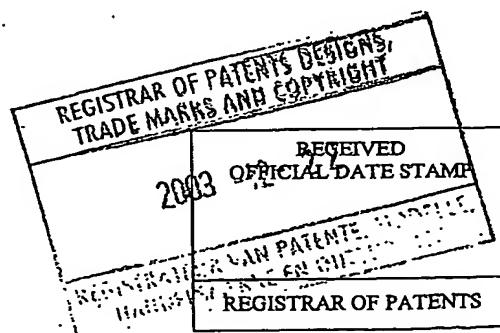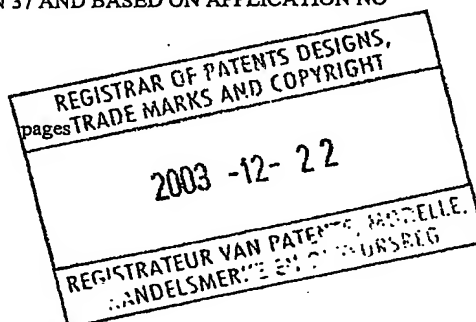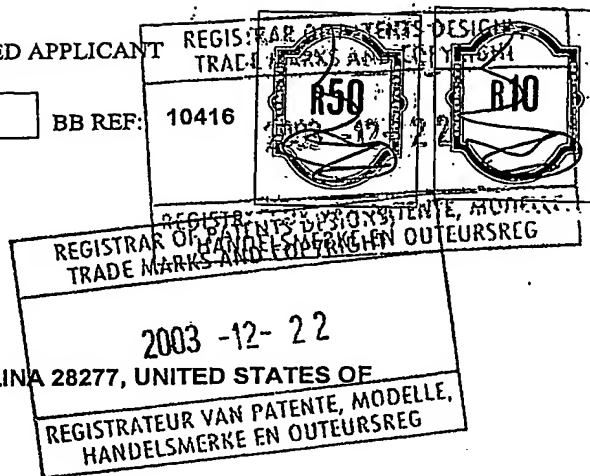

REPUBLIC OF SOUTH AFRICA
Patents Act, 1978**PROVISIONAL SPECIFICATION**

(Section 30 (1) - Regulation 27)

21	01	OFFICIAL APPLICATION NO
----	----	-------------------------

22	LODGING DATE
----	--------------

2003-12-22

2003/9885

71	FULL NAME(S) OF APPLICANT(S)
----	------------------------------

GSBS DEVELOPMENT CORPORATION

72	FULL NAME(S) OF INVENTOR(S)
----	-----------------------------

(1) DAVID DENOON-STEVENSON
(2) NEELS PAUL DE VILLIERS

54	TITLE OF INVENTION
----	--------------------

Network

FIELD OF THE INVENTION

THIS INVENTION relates to networks.

BACKGROUND TO THE INVENTION

In early computer systems, the construction comprised a mainframe computer and a series of terminals connected to the mainframe. The terminals had little or no processing power.

Over a period of time the nature of computer systems has changed. The mainframe has been replaced by a series of individual computers connected together in a network. In an office environment each individual computer can be a personal computer which is also called a desktop computer.

In the fire detection industry the personal computers of an office network are replaced by so-called panels each of which has computing power and which are connected together in a network. The panels "talk" to one another and to the fire detectors which are connected to them.

In all networks, the requisite network integrity is lost should a cable be damaged, resulting in an open circuit, or should the network be shorted out. In an office environment this is more of an inconvenience than a major problem. Some unsaved data may be lost but usually any problems which have arisen can be

rectified without there being long term effects. However, when the network is that of a fire detection system the consequences of the system being down for any period of time can be catastrophic.

Networks which are "self healing" have been proposed. Simply by way of example a system is known in which each node on a ring only "speaks" to its neighbour. If a host has any data which it needs to transmit, the data is loaded onto the controlling inter-node protocol. The data is then passed from node to node until all the nodes on the ring have received the data. The nodes continuously "handshake" with each other and, in the event of a fault which prevents data being transmitted along a specific route, an alternative route is arranged by the protocol.

The present invention seeks to provide an improved network based on the RS-485 protocol and which is capable of recovering from open and short circuits thereby to restore network integrity.

BRIEF DESCRIPTION OF THE INVENTION

According to one aspect of the present invention there is provided a network comprising a loop having therein a plurality of loop network monitors, each loop network monitor having an RS-485 port connected to a host which transmits and receives data, and two further RS-485 ports by way of which the monitors are connected into the loop.

Router logic under the control of a microprocessor can be provided for

controlling the transmission of data through the monitor.

The first mentioned RS-485 port can comprise termination jumpers which can be set in dependance on the nature of the host, an RS-485 transceiver and means for isolating the host from the router logic.

Each of said further ports can comprise a termination, an RS-485 transceiver, and means for isolating the router logic from the loop.

Each of said means for isolating can comprise an opto coupler.

According to a further aspect of the present invention there is provided a network loop monitor comprising an RS-485 port for connection to a host which transmits and receives data, and two further RS-485 ports for connecting the monitor into the loop.

The first mentioned RS-485 port can comprise termination jumpers which can be set in dependance on the nature of the host, an RS-485 transceiver and means for isolating the host from the router logic.

Each of said further ports can comprise a termination, an RS-485 transceiver, and means for isolating the router logic from the loop.

Each of said means for isolating can comprise an opto coupler.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention, and to show how the same may be carried into effect, reference will now be made, by way of example, to the accompanying drawings in which:-

Figure 1 is a diagram of a network loop monitor;

Figure 2 illustrates a multiple loop network; and

Figure 3 illustrates a further multiple loop network.

DETAILED DESCRIPTION OF THE DRAWINGS

The embodiment of the present invention illustrated in Figure 1 is a multidrop network based on the RS-485 protocol and using what is known as a class A-ring. A class A ring is a wire pair which runs in a loop, starting and ending at the same place. The loop is driven by a signal from the one end, and the same signal is monitored at the other end. Alternatively signals injected by nodes on the loop are monitored at each end of the loop. In this way, the integrity of the wire pair can be monitored by comparing the signals at each end and ensuring that they coincide.

The network loop monitor 10 shown in Figure 1 is connected to a wire pair 12 which forms a closed loop. There is a monitor 10 for each so-called RS-485 host. In the present embodiment each host is in the form of a fire detector panel (not shown in Figure 1) connected to the monitor by way of an RS-485 port 16. Two further ports 18 and 20 are used to connect the monitor 10 to the wire pair 12. The ports 16, 18 and 20 will be described in more detail hereinafter.

The monitor 10 includes a relay 22 the contacts 24 of which are in the wire pair 12. The contacts 24 of one of the monitors in the loop constituted by the wire pair 12 is normally open and this monitor is the network's "master" during normal operation. The contacts 24 of the remaining monitors are closed.

The wire pair 12 on either side of the break in the loop constituted by the open contacts 24, is "terminated" at 26 and 28 by the monitor 10. "Termination" is a well understood concept in RS-485 technology and involves providing an electrical resistance and fail safe biasing at the end of a line to prevent signal reflections (which are sometimes called "echoes"). If there is poor line impedance matching, reflections or echoes manifest themselves and these reflections are false signals which can interfere with operation. The fail-safe bias maintains a bias signal on the wire pair during intervals between transmissions. This ensures that the effects of noise on the line are eliminated or at least minimised.

Activation of the terminations 26, 28 is under the control of a microprocessor 30. If the microprocessor holds the contacts 24 open, it also activates the terminations 26, 28. If the contacts 24 are closed, meaning that the monitor in question is not at the end of the line, then the terminations 26, 28 are inactive.

The monitor further includes router logic 32 which is controlled by the microprocessor 30. The port 16 comprises termination jumpers 14, an RS-485 transmitter / receiver 34 and an isolator 36. The ports 18 and 20 comprise isolators

38, 40, RS-485 transmitter / receivers 42, 44 and the terminations 26, 28. The terminations 26, 28 are under the control of the microprocessor 30 whereas the termination jumpers are set manually in dependence on the nature of the host panel to which they are connected.

An incoming signal, if the contacts 24 are open and the termination 26 is enabled, passes through the termination 26. As explained above the termination prevents reflections. The signal reaches the RS-485 transceiver chip 42 which converts the signal from the RS-485 voltage levels which exist on the wire pair 12 to standard levels as used by logic and microprocessor circuitry. The isolator 38 is in the form of an opto coupler which converts the incoming signal to light and then back to an electric signal whereby isolation between the wire pair 12 on the one hand and the router logic 32 and micro controller 30 on the other hand is achieved.

Mode switches 46 and address switches 48 are connected to the microprocessor 30. The switches 48 are used uniquely to identify each network monitor in the system. The address set as 1 identifies the master network monitor and addresses 2 to 255 identify the slave network monitors. If address "0" is set, the monitoring function of the network monitor is disabled and the monitor then serves solely as a repeater. The mode switches set the parameters of the serial data transmitted to the network line monitors by the hosts. The parameters in question are baud rate, parity, and number of bits. These parameters are set to enable the data to be monitored correctly.

There are also mode switches which can be used to set the network monitors into a "booster" mode in which the relay contacts 24 open and data reaching the network line monitor is routed through the router logic and re-transmitted to the next network line monitor on the loop.

During normal operation, the switches 24 of all monitors in the circuit are closed except that of the master monitor, that is, the monitor with address 1. The switch 24 of this monitor is open. The terminations 26, 28 of the master monitor are switched in. The loop thus runs from the termination 26, through the switches 24 of all the other monitors and back to the termination 28.

When a network monitor 10 receives a signal from the host panel connected to port 16, the router logic 32 routes it to one or both ports 18, 20 depending on the setting of the mode switches 46. If the monitor 10 is the master monitor or a slave monitor it transmits the signal to one port 18, 20. If the monitor is set as a booster it transmits the signal to both ports 18 and 20.

Assuming that the monitor is a slave monitor, the contacts 24 are closed and the signal passes from the router through the isolator 40 to the RS-485 transceiver 44 and thence to the termination 28. The transceiver 44 is switched to its transmitter mode by the router logic 32 and the signal is thus driven onto the wire pair 12.

The transmitted signal reaches all the other monitors 10 on the loop

which will "see" the signal at the ports 18 which are switched to the receive mode. The signal is picked up by the transceiver 42 and passed via the isolator 38 to the router logic 32. The router logic sends the signal to the host connected to the port 16. On completion of the transmission, all the microprocessors in the loop (which detect or "listen in" to the transmissions) reset the router logics 32 which in turn switch the transceivers 42, 44, 34 back to receive mode. The network is now clear for another host to transmit a signal.

The master monitor 10 checks the integrity of the circuit by comparing data received at the port 18 with data received at the port 20. If the ports 18, 20 do not detect the same signal, then there is a fault on the pair 12 which is preventing one of the signals on the loop from reaching the master monitor.

To ensure that faults are detected, and the network collapsed if the fault is significant enough, it is possible to provide a number of error checking counters. The following is an example of a suitable error checking system.

The three counters of this system work on the basis that if the ratio between the data that the counter detects as good data and the data that the counter detects as bad data exceeds a preset limit, either a healing or disconnect operation is initiated. The type of operation initiated depends on what the data is that the counter is checking. The ratio is determined on the basis of a "moving window" which means that the ratio of good data to bad data in the preceding period of a number of seconds is determined. The number of seconds varies from counter

to counter.

In the specific system under consideration there is a counter which monitors the transmissions from the host. No data being transmitted is, in this counter's program, determined to be good data. This counter can have a moving window of up to, for example, fifteen seconds. In the event that the preset error ratio is exceeded, the micro controller 30 instructs the router 32 to disable the host port 16. The port 16 remains disconnected until the error ratio has fallen below the preset value. Network collapse is not initiated as the host transmitting too much bad data is disconnected before the bad data causes network collapse.

The second counter checks the integrity of the ring constituted by the pair 12. The moving window of this counter can be twice as long as that of the first counter discussed. Only the master network monitor includes a counter of this type and it compares the data on the ports 18 and 20. As with the host monitor's counter, the absence of data is deemed to constitute good data. In the event that the error ratio rises too high a signal initiating network collapse is initiated by the master monitor.

The third counter is the data quality counter. Each of the monitors has such a counter and checks all data "seen" by the ports 18 and 20.

In respect of these counters, the absence of any data is deemed to be bad data when the error ratio is being calculated. The length of the moving window

is longer than that of the other two counters discussed. As an example it can be twice the length of the window of the loop integrity counter plus the amount of time required to complete the healing operation which it or the ring integrity counter may initiate.

The counter of a slave monitor, on detecting an unacceptable error ratio, opens its relay contacts 24 thereby to generate a network collapse signal.

The master monitor 10 is programmed, following such collapse, to institute the self healing program.

A signal from the master monitor is transmitted through either the port 18 or the port 20 onto the wire pair 12. The relay contact 24 of the master monitor is open at this time to ensure that the signal travels in the desired direction around the loop.

The signal, upon reaching a slave monitor 10, closes that monitor's contacts 24 and is transmitted on to the next monitor in the sequence. In the event that the next slave monitor does not receive the signal, the slave monitor activates its termination 26 or 28 and becomes the end monitor of that part of the circuit.

The master monitor then directs a "healing signal" in the other direction from the other port 20, 18 and the procedure is repeated.

A protocol is used whereby the master monitor exchanges "hand shake" signals with each successive slave monitor during the continuing process of sending and acknowledging data. In the event that one of the slave monitors fails to exchange "hand shakes" with the master monitor when required, it is assumed that the last link is faulty.

At the end of a healing operation, but in the event that there is an unrectified fault on the wire pair 12, the contacts of the master monitor close so that it acts as a slave and the monitors on each side of the fault activate their terminations thereby isolating the faulty part of the line which lies between them. Only when the fault is repaired and the network reset does the master monitor resume that function.

If a slave monitor 10 has opened its contacts 24 due to a collapse command or a time out, that is, the total absence of data for a predetermined period of time, the contacts 24 will remain open for a predetermined time waiting for a command from the master monitor. If no such command is received one of the slave monitors, that with the shortest waiting time which is dependant on its address switches, will assume the role of a master monitor. Because all the waiting times are different, no two monitors on the network will assume the role of master network monitors simultaneously.


In Figure 2, two loops 50, 52 are shown. One loop comprises monitors 10.1 to 10.4 and the other comprises monitors 10.11 to 10.14. RS-485 hosts 54.1,

-13-


54.2 etc and 54.11, 54.12 etc. are connected to the ports 16 of the monitors. One monitor of each ring (the monitors 10.1, 10.11 in the illustrated form) have their ports 16 connected.

In Figure 3 the network comprises a central ring 50 and four outer rings 100. The ring 50 is connected to the ring 100 by way of the ports 16 of the four monitors 10 in the central ring and the port 16 of one monitor 10 in each outer ring.

Dated this 19th day of December 2003

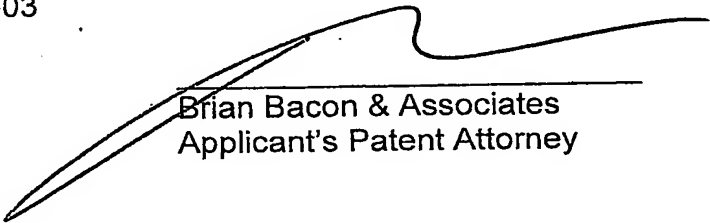

Brian Bacon & Associates
Applicant's Patent Attorney

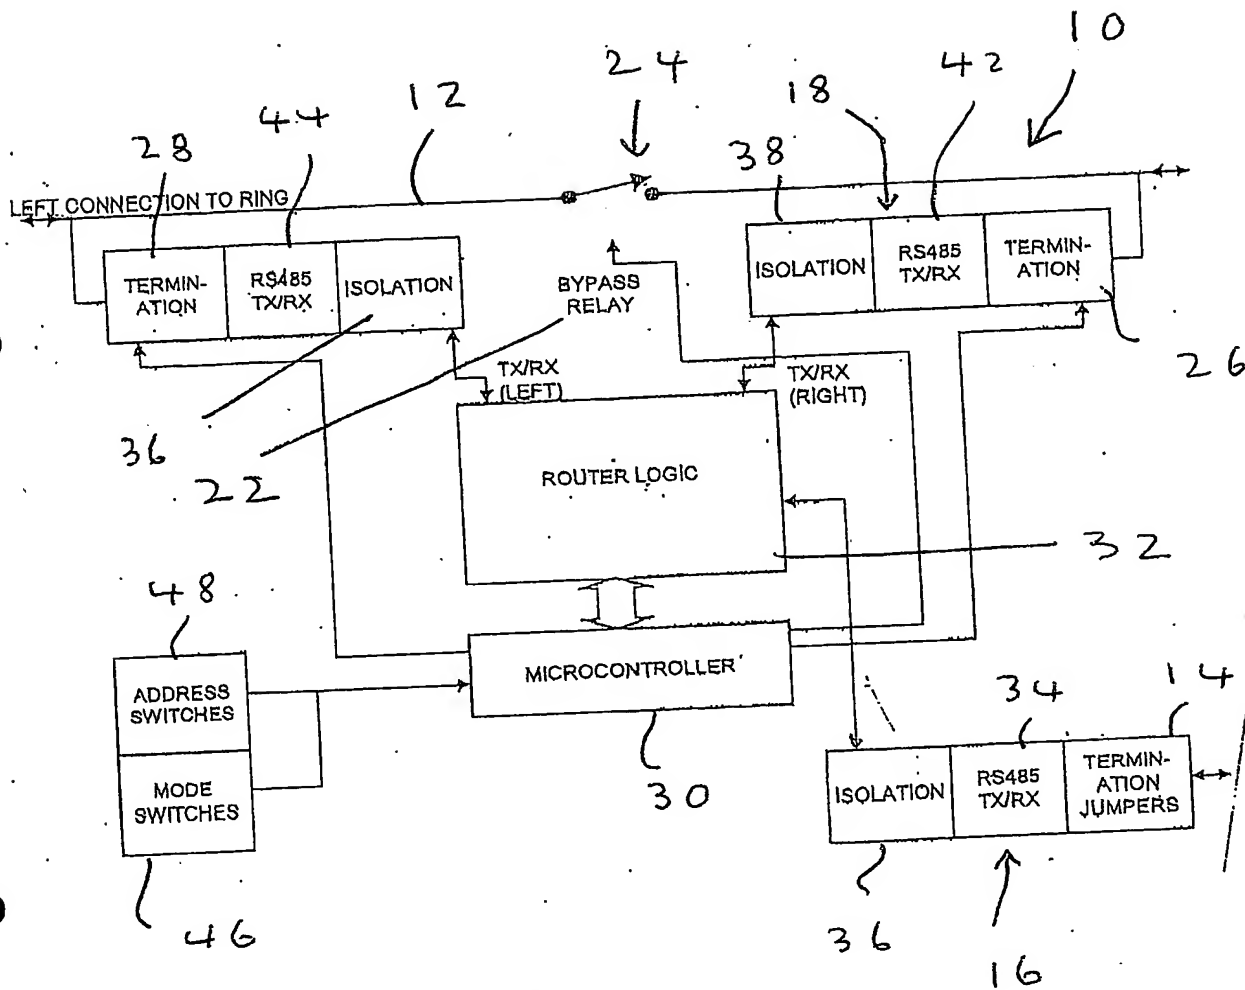

~~Brian Bacon & Associates
Applicant's Patent Attorneys~~

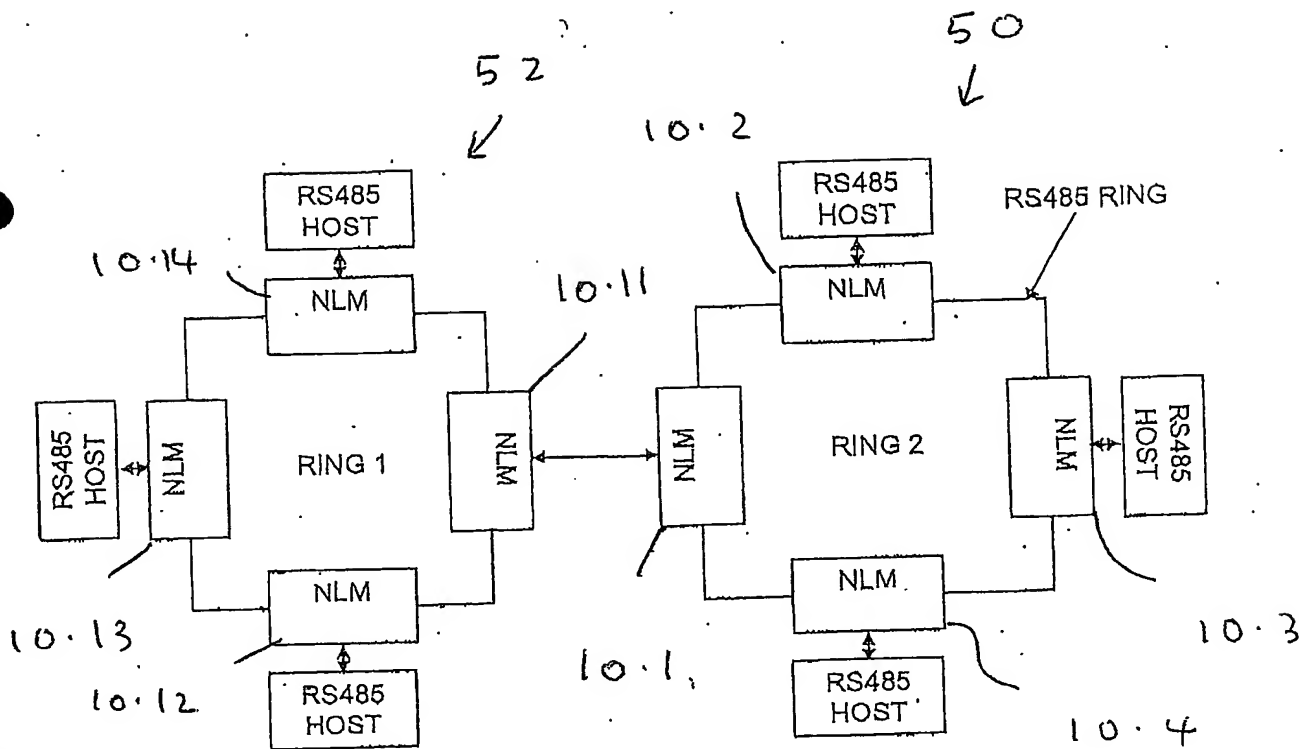


Fig. 2

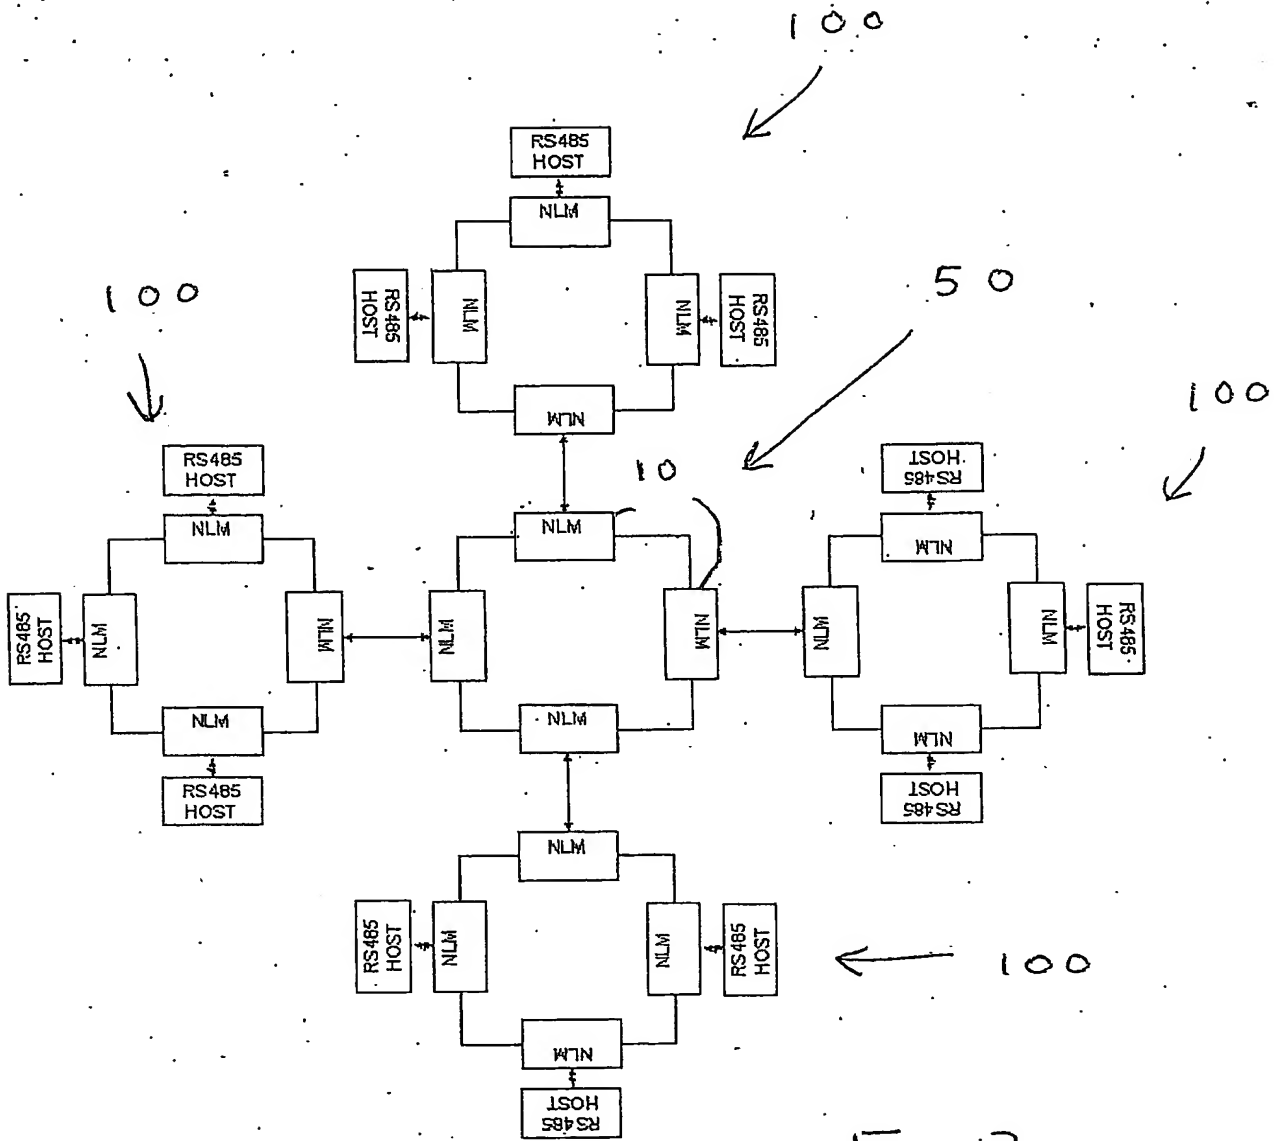


Fig. 3

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/ZA04/000159

International filing date: 21 December 2004 (21.12.2004)

Document type: Certified copy of priority document

Document details: Country/Office: ZA
Number: 2003/9885
Filing date: 22 December 2003 (22.12.2003)

Date of receipt at the International Bureau: 12 September 2005 (12.09.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☒ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.